

BEOPLAY V1

BeoPlay V1-32

BeoPlay V1-40



Dear Customer

This Getting Started contains information about the setting up and daily use of your B&O PLAY product and connected equipment.

Your television offers more features and functions than described in this Getting Started. Among other things; Sleep Timers, pin code system and network settings. These and other features are described in more detail in the product's online guide or in the help texts in the television menus.

The guides are found on www.beoplay.com/v1/support.

The guides and the on-screen help texts are also kept up to date if new software introduces new or modified features and functions in your television.

On www.beoplay.com/v1 you can also find more information and relevant FAQs (Frequently Asked Questions) about your product.

Your retailer is your first stop for all your service queries.

Technical specifications, features and the use thereof are subject to change without notice.

Cautions

- Ensure that the television is positioned, set up and connected in accordance with the instructions in this Getting Started. To prevent injury, use Bang & Olufsen approved stands and wall brackets only!
- Place your television on a firm, stable surface.
- Do not place any items on top of your television.
- Do not subject the television to rain, high humidity or sources of heat.
- The television is intended for indoor use in dry, domestic environments only. Use within a temperature range of 10–40°C (50–105°F).
- If the television has been exposed to temperatures below 5°C (40°F), leave it at room temperature and wait until the television has regained normal room temperature before it is connected to the mains and switched on.
- Do not place the television in direct sunlight or direct artificial light, such as a spotlight, as this may reduce the sensitivity of the remote control receiver. Also if the screen is overheated, black spots may appear in the picture. These spots disappear again, once the television cools down to normal temperature.
- Leave enough space around the television for adequate ventilation.
- No naked flame sources, such as lighted candles should be placed on the apparatus.
- To prevent the spread of fire, keep candles or other open flames away from this product at all times.
- Do not attempt to open the television. Leave such operations to qualified service personnel.
- Do not strike the glass with hard or pointed items.
- The television can only be switched off completely by disconnecting it from the mains socket. The mains socket must always be accessible.
- Follow instructions to ensure correct and safe installation and interconnection of equipment in multimedia systems.
- The product label is placed behind the connection cover.

Contents

Setting up

- 6 How to set up your television
- 8 Connection panel – BeoPlay V1–32
- 10 Connection panel – BeoPlay V1–40

Daily use


- 12 How to use your remote control
- 13 How to navigate in menus
- 15 Watch television
- 16 Media browser
- 17 Change picture or sound settings
- 18 Cleaning
- 19 How do I ...

How to set up your television

Guides and more information, for example, FAQs (Frequently Asked Questions) are found on www.beoplay.com/v1/support.

1. Unpack the television


Unpack the television and place it on a soft blanket. Remove the four pins from the television.

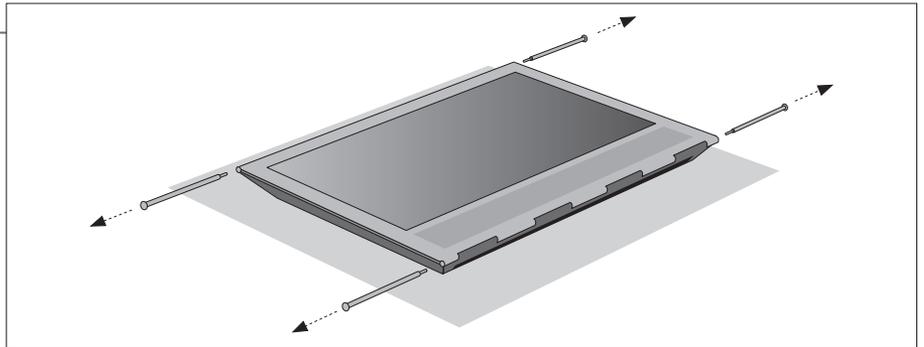

2. Insert speaker cover and mount stand/wall bracket

Before mounting the stand or wall bracket, remember to insert the speaker cover. Hold the speaker cover with both hands and slide it carefully into the hole on the side of the television.


Then mount the stand or wall bracket (see separate guide).

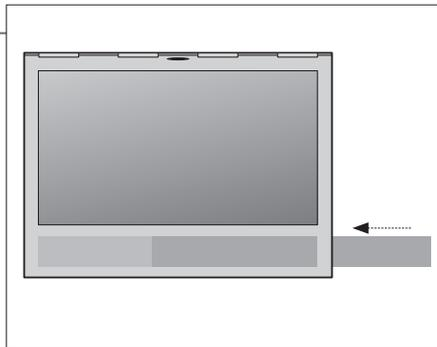

To remove the speaker cover, gently push it out using one of the four pins removed from the television. If the television is mounted on the table stand or wall bracket, you must first remove the sides on the stand or wall bracket to remove the speaker cover. See the guides enclosed with the stand or wall bracket.

3. Connect your TV

- To remove the connection cover, pull out at the bottom first to release the cover, then pull it off.
- Connect the mains cord, Ethernet cable and the aerial or satellite cable depending on your setup. For a wireless connection (optional), see below.*¹
- Switch on the television (press TV). If prompted for a pin code, enter the pin code provided by your retailer and continue with first-time setup (see next page).

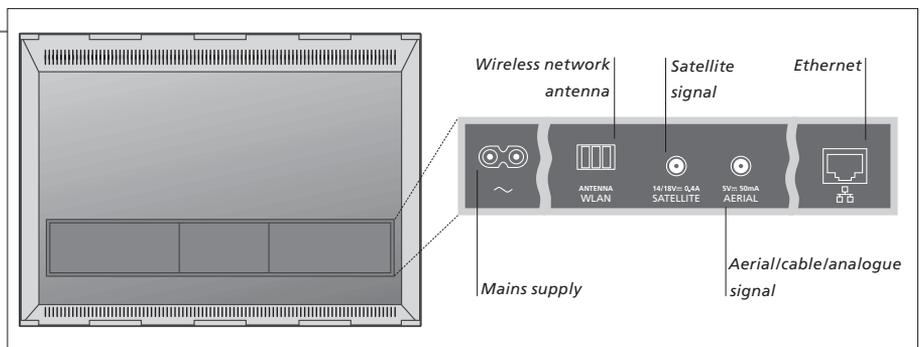

Important – guides and FAQs are found on www.beoplay.com/v1/support

Ventilation To ensure proper ventilation, allow enough space around the screen. Do not cover the ventilation grill. At overheating (flashing standby indicator and an on-screen warning), switch the TV to standby, not off, in order for the TV to cool down. You cannot operate the TV during this time.

Ethernet connection Connect your television to the Internet to receive software updates and download Peripheral Unit Controller (PUC) tables. It is recommended that you set the television to update software automatically.

***Wireless setup** A wireless setup requires that your television has a built-in wireless module and that you have purchased a wireless network antenna. For more information, see the online guide.

For information on your Beo4 remote control, see page 12 or your Beo4 guide.


4. First-time setup

You will be guided through a number of menus where you must make different settings. Use the Beo4 navigation button \leftarrow , \rightarrow , \uparrow and \downarrow , and press in the middle to select settings. In some submenus, press **BACK** to return to first-time setup.

You can change the settings again later if you wish. If you receive your TV signal via a set-top box, select **NONE** in **INPUTS**. Set up your set-top box as illustrated below.

MENU LANGUAGE
SOFTWARE UPDATE (USB)
COUNTRY
LANGUAGE
NETWORK SETTINGS
SOFTWARE UPDATE (INTERNET)
SPEAKER SETTINGS
ACCESS CONTROL
INPUTS (TV TUNING)
NICE TO KNOW

Follow on-screen instructions. When available, press the **blue** button for help texts.




5. Connect external equipment

The illustration here is only one example of many possible setups.

When you connect external equipment, for example a set-top box, to the HDMI IN socket on the television (see next pages), you are prompted to configure the source. Follow on-screen instructions.

For information on other setup options, PUC tables and IR-transmitters, see the online guide available on www.beoplay.com/v1/support.


It is possible to control non-Bang & Olufsen equipment using the Beo4 remote control with a Peripheral Unit Controller (PUC) table. For PUC to work, an IR-transmitter must be placed close to the IR-receiver on the connected equipment. Check the IR-signal before attaching the IR-transmitter.

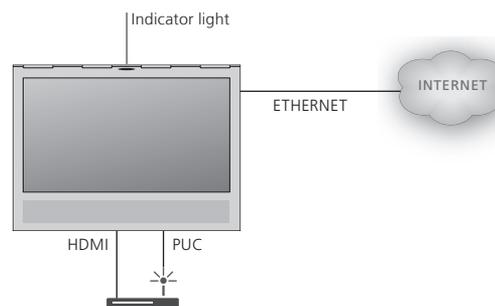

6. Run cables

You can fasten the cables to either sides or in the middle, depending on stand or wall bracket placement. For safety reasons, secure the cables with the enclosed cable ties.

When you have made all the connections, mount the connection cover.

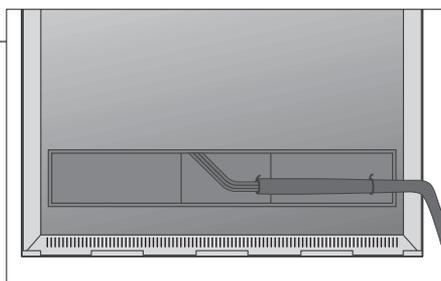


If you have a wall bracket, make sure that there is enough slack in the cables to allow the TV to turn before you fasten the cables with cable ties to make a neat bundle.

Indicator light – Green	The indicator light flashes green shortly and the TV is ready to be used. To reduce start up time, see the online guide regarding power settings.
Solid red	The TV is in standby but leave it connected to the mains supply due to software downloads.
Slowly flashing red	The TV has been disconnected from the mains supply and you must enter the pin code. See the online guide for more information on the pin code system, available on www.beoplay.com/v1/support .
Quickly flashing red	Do not disconnect the TV from the mains supply. Could be due to new software being activated or too many failed pin code attempts.
Off	The TV is in standby and you can disconnect it from the mains supply if you want. However, this activates the pin code system.

Connection panel – BeoPlay V1–32

Any equipment you connect to the connection panel must be registered in the SOURCE LIST SETUP menu.

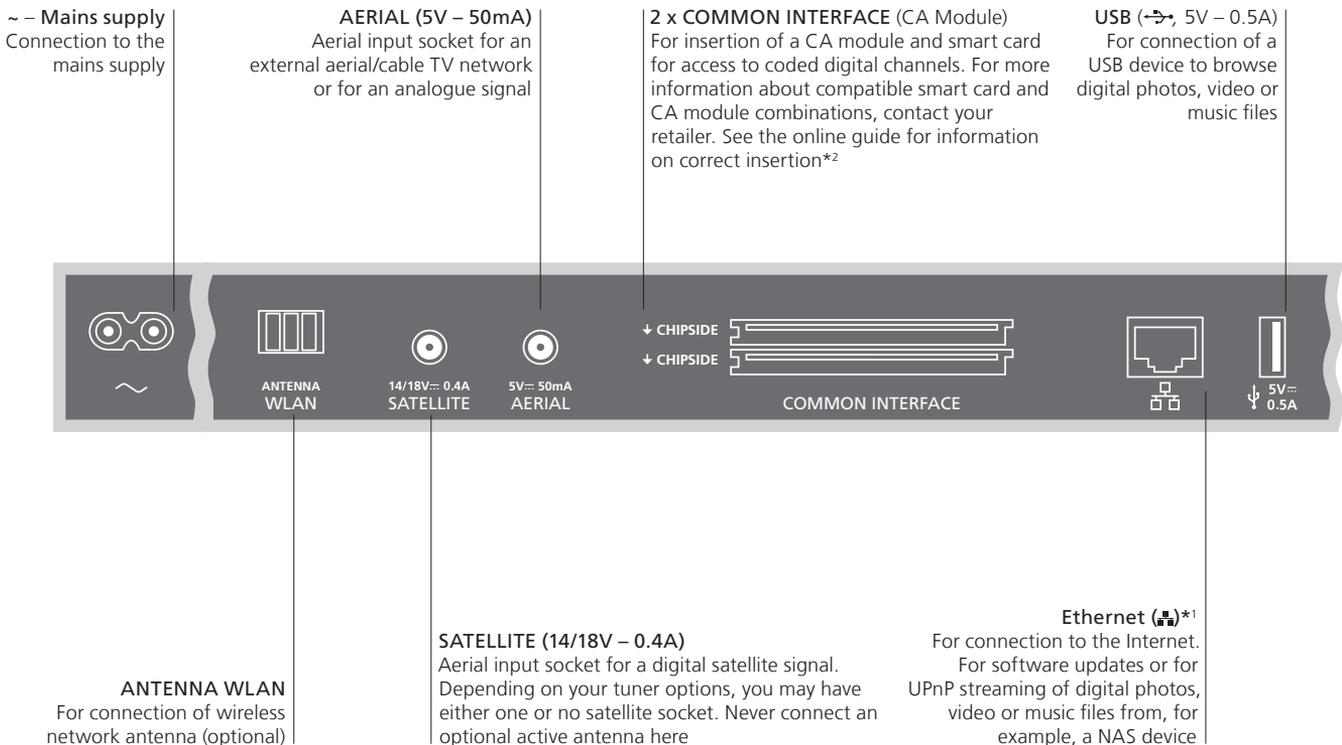


Important

Mains cord and plug Connect the ~ socket on the connection panel of your TV to the wall outlet. The TV is in standby mode and ready to be used. The supplied plug and mains cord are specially designed for the product. Do not change the plug and if the mains cord is damaged, you must buy a Bang & Olufsen approved mains cord.

¹*Make sure the cable connection between the product and the router does not exit the building to avoid contact with high voltage.

We recommend that you connect the television to the Internet to be able to receive software updates and to download Peripheral Unit Controller (PUC) tables. PUC tables enable you to operate connected non-Bang & Olufsen products with the Beo4 remote control with navigation button.

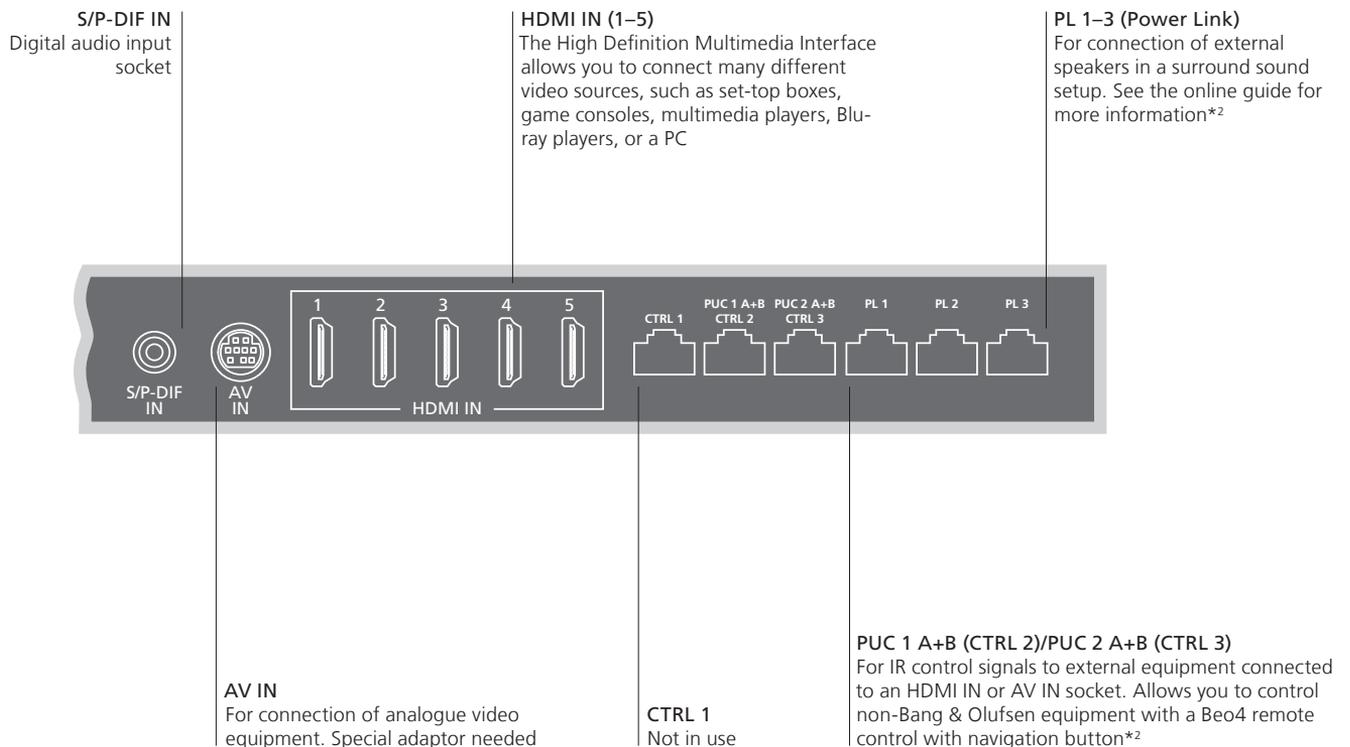

- Cables and adaptors** Depending on the type of equipment you connect to the television, different cables and maybe also adaptors are needed. Cables and adaptors are available from your Bang & Olufsen retailer.
- Ethernet connection** Connect your television to the Internet to receive software updates and download Peripheral Unit Controller (PUC) tables. It is recommended that you set the television to update software automatically.
- *2*Online guide** The online guide includes more information about setup and connection of external equipment.


Connection panel – BeoPlay V1–40

Any equipment you connect to the connection panel must be registered in the SOURCE LIST SETUP menu.

SATELLITE (14/18V – 0.4A)
Aerial input socket for a digital satellite signal. Depending on your tuner options, you may have either one or no satellite socket. Never connect an optional active antenna here

2 x COMMON INTERFACE (CA Module)
For insertion of a CA module and smart card for access to coded digital channels. For more information about compatible smart card and CA module combinations, contact your retailer. See the online guide for information on correct insertion*²

USB (→, 5V – 0.5A)
For connection of a USB device to browse digital photos, video or music files

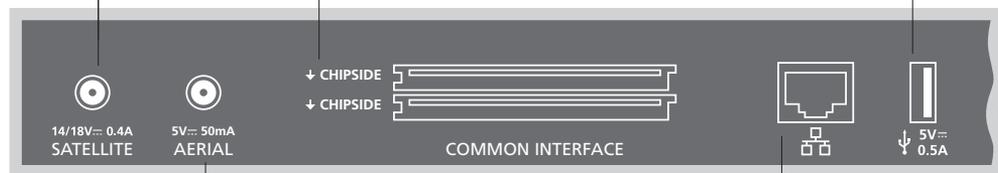

AERIAL (5V – 50mA)
Aerial input socket for an external aerial/cable TV network or for an analogue signal


Ethernet (RJ45)*¹
For connection to the Internet. For software updates or for UPnP streaming of digital photos, video or music files from, for example, a NAS device

Important

Mains cord and plug Connect the ~ socket on the connection panel of your TV to the wall outlet. The TV is in standby mode and ready to be used. The supplied plug and mains cord are specially designed for the product. Do not change the plug and if the mains cord is damaged, you must buy a new one from your Bang & Olufsen retailer.

^{1*}Make sure the cable connection between the product and the router does not exit the building to avoid contact with high voltage.

We recommend that you connect the television to the Internet to be able to receive software updates and to download Peripheral Unit Controller (PUC) tables. PUC tables enable you to operate connected non-Bang & Olufsen products with the Beo4 remote control with navigation button.

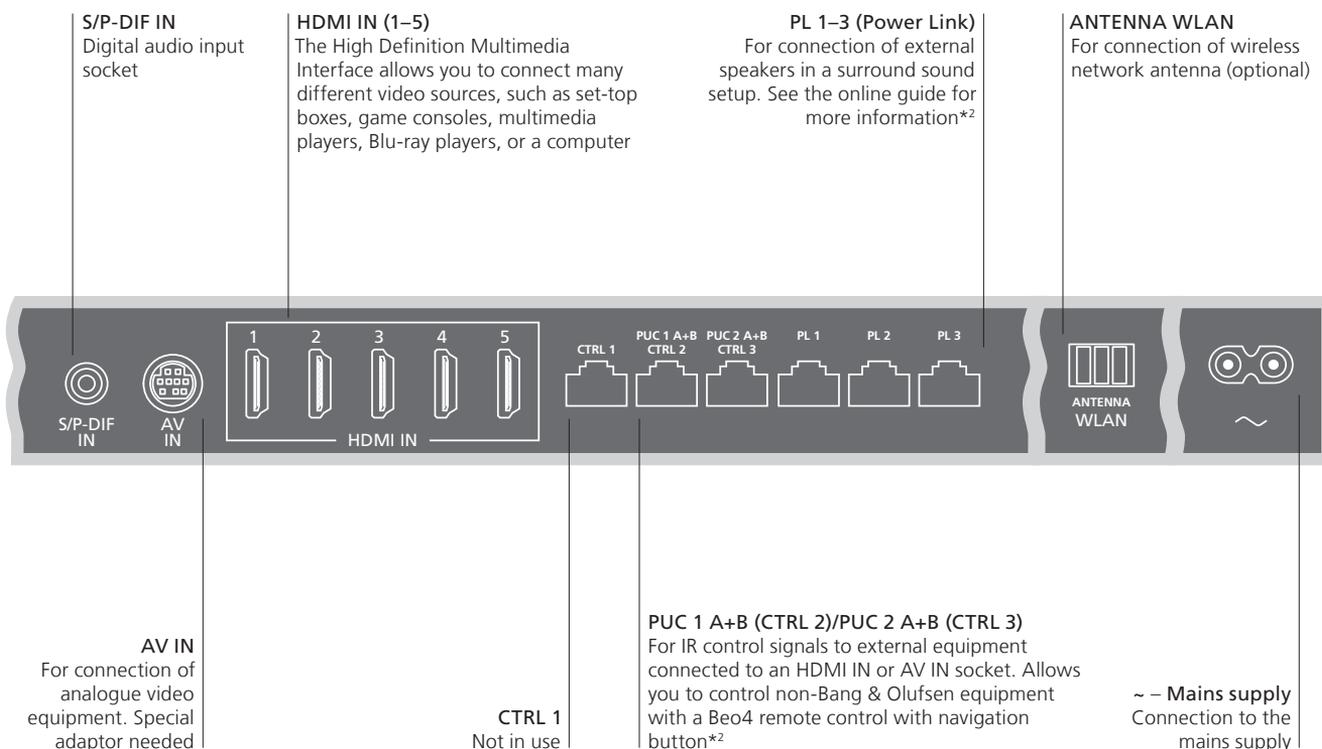

Cables and adaptors

Depending on the type of equipment you connect to the television, different cables and maybe also adaptors are needed. Cables and adaptors are available from your Bang & Olufsen retailer.


Ethernet connection

Connect your television to the Internet to receive software updates and download Peripheral Unit Controller (PUC) tables. It is recommended that you set the television to update software automatically.

²*Online guide

The online guide includes more information about setup and connection of external equipment.

How to use your remote control

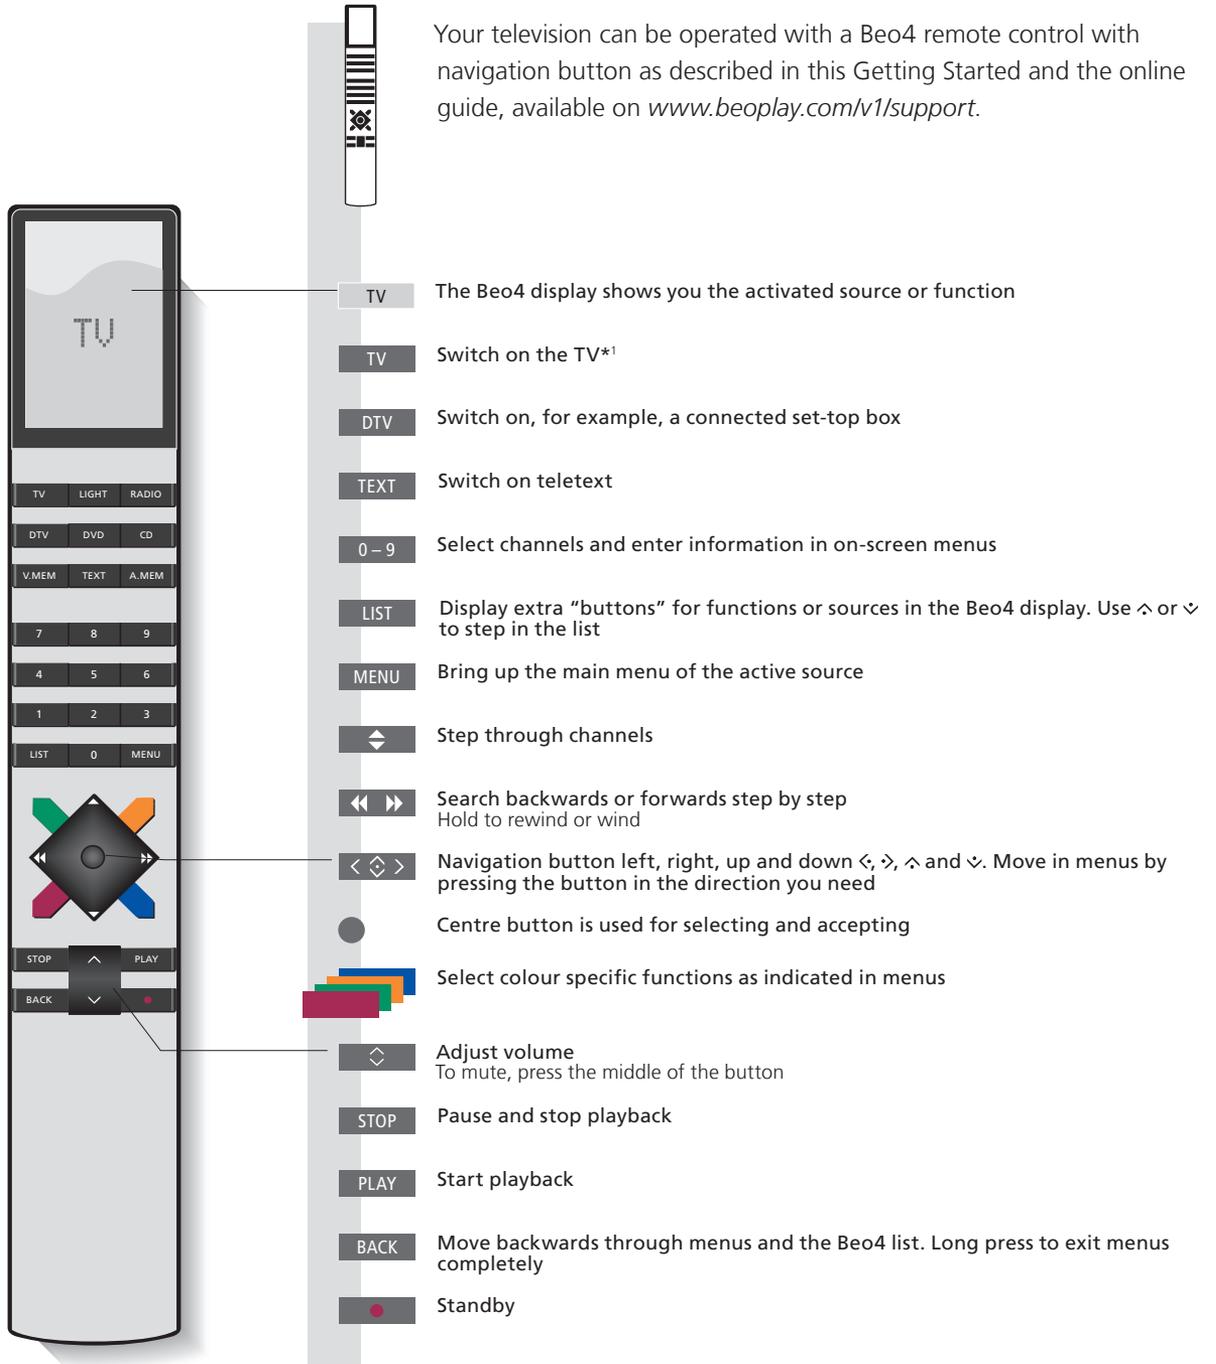

Important – guides and FAQs are found on www.beoplay.com/v1/support

***Beo4 buttons** Some buttons can be reconfigured during the setup process. See the online guide for more information.

NOTE! For general information about remote control operation, see the guide enclosed with your remote control.

Digital Text/MHEG Some countries and CA modules require activation of Digital Text/MHEG. If Digital Text/MHEG is activated, some differences apply for Beo4. When no menu is shown on the screen, you must press **MENU** before a coloured button.

MODE settings Check that your Beo4 remote control is in **MODE 1**. See page 19 on how to set up your Beo4.

Navigate in menus and select settings using your remote control.

Display and menus

Select source and adjust settings.



Switch on TV



Show menu*¹

Navigate in menus

When a menu is on the screen, you can move between menu options, reveal settings or enter data.



Highlight menu /change setting



Enter data



Bring up sub-menu/store setting



Select option



Move backwards through menus

or



Press and hold to exit menus

Step between menu pages

Some menus take up more space than available on the television screen. This is indicated by half a menu item at the bottom or top of the screen. To easily step from the top of a list to the bottom, use the navigation button up.



Step in pages



Scroll through menu items

A solid line indicates that selection must be made using the **centre** button



A gradient line indicates that you can edit settings using the navigation button left and right



Example of channel list.

Information

- *Main menu** You can always bring up the main menu including a menu overlay listing all the special functions for the active source.
- Help texts** In the SETUP menu, you can show/hide help texts using the **blue** button. Some help texts may cover the menu. For some languages, help texts are only available in English.

Select source

You can select a source just by pressing the dedicated button on the remote control, or you can select a source via the menu.

**Bring up help texts**

You can bring up help texts with explanations of features and functions when available in menus and submenus.



General features and functions are also explained in the NICE TO KNOW menu.*¹

Information

¹***NICE TO KNOW menu** Access the menu from the SETUP menu. You can read about basic features and functions. When your television receives software updates (requires Internet connection), new features and functions will be explained here.

Watch analogue and digital terrestrial, cable and satellite channels depending on your tuner options. You can also add favourite channels to a group and bring up teletext if available.

Switch on the TV

 Press, for example, TV

Select a channel

 Select *or*  Select channel  Select previous channel

Bring up and use the menu overlay

You can bring up the main menu including functions for the active source.

 Press *or*  *or*  Activate the desired function*¹

Adjust the volume

 Adjust volume  Press in the middle to mute sound  Press to bring sound back

Make channel groups

If you have a lot of channels, you can make groups to find your favourite channels easily.

 Bring up the FAVOURITES menu*²  Name a group as instructed on-screen  Press twice to store and open group    Select a group to copy from. Follow on-screen instructions   Store settings

Use teletext

If available from your programme provider, you can bring up teletext for the selected channel.

 Press repeatedly to change screen mode  Step up or down in pages *or*   Move to PAGE and step *or*  Enter page number  Short press to go to previous page. Long press to exit teletext

Information

Programme Guide and information

For information about Programme Guide and information, see the online guide on www.beoplay.com/v1/support.

¹*Coloured functions

You can also activate coloured functions without pressing **MENU** first if Digital Text is disabled.

²*FAVOURITES menu

To bring up the FAVOURITES menu, press **MENU**, select **SETUP**, then **CHANNELS** and **EDIT TV GROUPS**.

Media browser

You can play music and video files and browse photos stored either on a storage device or in a product connected via a DLNA/UPnP enabled media server. For more information about connections and functions, see the online guide available on www.beoplay.com/v1/support.

Use media browser

MEDIA

When you connect a storage device to your television, it detects the source automatically and asks if you want to browse the content. You can also access the MEDIA BROWSER menu via the SETUP menu.

Bring up MEDIA in your Beo4 display*¹

Listen to your music

Select the folder with the music you wish to listen to.



Select storage device with music



Browse in files or step in tracks. Select a music file to start playback



Pause



Resume playback



Back up through menus or hold to return to the media browser main menu

Browse your photos

Select the folder with the photos you wish to watch.



Select storage device with photos



Browse files and folders and press to start slideshow



Pause



Step between previous and next photo

Playback video files

Select the folder with the video files you wish to watch



Select storage device with video files



Browse files and folders and press to open



Step minute by minute. Press and hold to cue. Press again to change speed



Resume playback

Information

¹*Beo4 LIST

If you do not have the MEDIA button in the Beo4 LIST, you can dedicate another button to the media browser in the SETUP menu. See page 19.


Storage devices Access MEDIA BROWSER source

You can connect, for example, USB devices and hard disks connected via USB or Ethernet. You can bring up the main menu, select SOURCE LIST, highlight MEDIA BROWSER, and press the centre button to activate the media browser.

While you watch television, you can adjust the sound and picture settings. See the online guide on www.beoplay.com/v1/support for more information about these settings.

Select sound modes

The television has several sound modes optimised for different types of programmes. In the SOURCE LIST SETUP menu, you can, for each source, set up a sound mode to be used each time you activate this source.



or



Select between sound modes 1–9 if you remember the number of the mode you want*1

Bring up sound modes on the television screen and select mode

Select picture modes

You can activate different picture modes to use for different types of programmes. When you select a picture mode for a source, it is only saved until you switch off the television or switch to a different source.

In the SOURCE LIST SETUP menu, you can, for each source, set up a picture mode to be used each time you activate this source.



or




Select between picture modes 1–3 if you remember the number of the mode you want*1

Bring up picture modes on the television screen and select mode

Select picture format

In the SOURCE LIST SETUP menu, you can, for each source, set up a picture format to be used each time you activate this source. You can also select a different picture format temporarily. Note that you cannot change picture format, when Digital Text is enabled and an MHEG application is shown on the screen. For more information about Digital Text, see the online guide.



or



Select between picture formats 1–3 if you remember the number of the format you want

Bring up picture formats on the television screen and select format

Swap between formats

AUTO (select 1)

To reduce black bars in top and bottom, the picture is scaled without changing the picture geometry. However, if a 4:3 source signals a wrong aspect ratio, the picture will be stretched horizontally

AUTO WIDE (select 2)

To reduce black bars in top and bottom, the picture is scaled and stretched horizontally to fill out as much of the screen as possible

SOURCE FORMAT (select 3)

The source determines the picture format

Information

*1*Beo4 LIST In order to display SOUND or PICTURE on Beo4, you must first add them to the Beo4 list of functions, see page 19.

Cleaning

Regular maintenance, such as cleaning, is the responsibility of the user. To achieve the best result, follow the instructions below.

Screen

- Wipe dust off the screen using a dry, soft cloth.
- To remove stains or dirt, use a soft, lint-free, firmly wrung cloth and water.
- Never use alcohol or other solvents to clean any parts of the TV.
- Do not strike the screen with hard or pointed items.
- Some micro-fibre cloths may harm the optical coating due to their strong abrasive effect.

Cabinet

- Wipe dust off the surfaces using a dry, soft cloth.
- To remove stains or dirt, use a soft, lint-free, firmly wrung cloth and a solution of water and mild detergent, such as washing-up liquid.
- Never use alcohol or other solvents to clean any parts of the TV.

Speakers

- Avoid spraying liquid directly on the screen as this may damage the speakers.
- The speakers may be cleaned with a vacuum cleaner with a brush nozzle, and set to the lowest suction level.
- To remove the speaker cover, gently push it out using one of the four pins removed from the television. When the television is mounted on the wall bracket or table stand, you must first remove the sides on the stand or wall bracket to remove the speaker cover. See guide enclosed with the stand or wall bracket.

For more information on your Beo4 remote control, see the Beo4 guide.

... add a new 'button' to my Beo4 list?

To activate some functions on your Beo4 remote control, you must first add the 'button' to the Beo4 list of functions.

- > Press and hold the standby button down.
- > Press **LIST** to get access to the Beo4 setup function.
- > Let go of both buttons. **ADD?** appears in the display.
- > Press the centre button and use the navigation button up to select, for example, **AV?**
- > Press the **centre** button to bring up the list of extra 'buttons' to add from. The first 'button' appears in the display, it flashes on and off.
- > Press the navigation button up and down to move forwards or backwards in the list of extra 'buttons'.
- > Press the **centre** button to add and place the 'button' on its preset position in the list, or ...
- > ... press **1 – 9** to insert the 'button' at a specific position in the list.
- > **ADDED** appears, indicating that the 'button' has been added. Long press on **BACK** will leave the setup.

... select another Beo4 button to activate a source?

If you want another Beo4 button to activate a source, you can change this in the SOURCE LIST SETUP menu.

- > Press **MENU** and bring up the SETUP menu.
- > Bring up the SOURCE LIST menu.
- > Select the source you want to configure, for example MEDIA BROWSER, and press the **centre** button.
- > Step to the BUTTON menu and use the navigation button right to bring up the list of buttons.
- > Use the navigation button up and down to step between the buttons and press the **centre** button to select the button you want to use.

... set my Beo4 in MODE 1?

A Beo4 remote control with navigation button must be set to MODE 1.

- > Press and hold the standby button down.
- > Press **LIST** to get access to the Beo4 setup function.
- > Let go of both buttons. **ADD?** appears in the display.
- > Press **LIST** or navigation button up to display **MODE?** on Beo4.
- > Press the **centre** button to select the setup you want.
- > Press the navigation button up and down to display **MODE 1** on Beo4.
- > Press the **centre** button to store the configuration.
- > **STORED** appears, indicating that the configuration has been stored. Long press on **BACK** will leave the setup.

Waste Electrical and Electronic Equipment (WEEE) – Environmental protection



Electrical and electronic equipment, parts and batteries marked with this symbol must not be disposed of with normal household wastage; all electrical and electronic equipment, parts and batteries must be collected and disposed of separately.

When disposing of electrical and electronic equipment and batteries by use of the collection systems available in your country, you protect the environment, human health and contribute to the prudent and rational use of natural resources.

Collecting electrical and electronic equipment, batteries and waste prevents the potential contamination of nature with the hazardous substances which may be present in electrical and electronic products and equipment.

Your Bang & Olufsen retailer will advise you of the correct way of disposal in your country.

This product complies with applicable environmental legislation throughout the world.

CE0889D

Hereby, Bang & Olufsen declares that this Television with WLAN is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The Declaration of Conformity may be consulted at www.beoplay.com/v1.

AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LI, LT, LU, LV, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR.

This equipment should be installed and operated with minimum distance 20 cm between the antenna and your body.

This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights. Use of this copyright protection technology must be authorized by Rovi Corporation, and is intended for home and other limited viewing uses only unless otherwise authorized by Rovi Corporation. Reverse engineering or disassembly is prohibited.

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.



Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.



Manufactured under license under U.S. Patent Nos: 5,956,674; 5,974,380; 6,487,535 & other U.S. and worldwide patents issued & pending. DTS, the Symbol, & DTS and the Symbol together are registered trademarks & DTS 2.0 Channel is a trademark of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.



351100812010008

